


Marley's complete range of PE: Power, Comms & Fibre Optic

High Quality PE; Long design life; Perfect for directional drilling.
Made to AS/NZS 4130 dimensions; Major Telco & Power approval.
Range of PE jointing fittings: Marley Compression & Friatec Electrofusion.

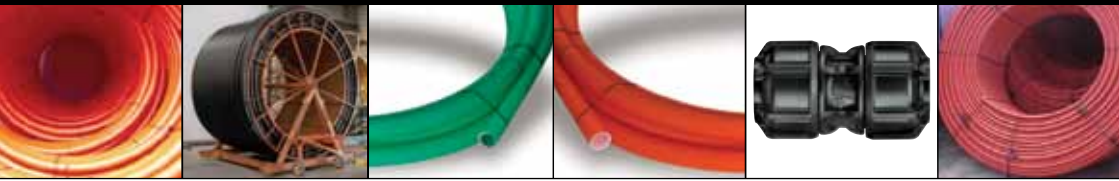

CODE PREFIX	Normal Size Pipe (OD) mm	SDR	Ave Wall Thickness mm	Ave Bore (ID) mm	Common Lengths m	Others Lengths m	Common Colours***
SERVD.20	20	11	2.2	15.7	200	500	G
SUBD.25	25	11	2.5	20.2	500, 1000	200	G, R
SUBD.32	32	13.6	2.6	27.0	500, 1000	200, 400, 500	O, G, R, V, B
COMD.40	40	17	2.6	35.0	100, 200		O, G, R
COMD.50	50	17	3.2	43.9	100, 200	500	O, G, R
COMD.63	63	17*	4.0	55.2	100, 150	50, 200, 400	O, G, R
COMD.90	90	17	5.6	79.0	100		O, G
COMD.110	110	17*	6.9	96.5	100, 150	12, 50, 200, 450**	O, G, R, S
COMD.125	125	17	7.8	110.0	100	200 - 500	O
COMD.140	140	17*	9.3	122.1	100	12, 300**	O
COMD.160	160	17*	10.0	140.7	12	300 - 450**	O

SDR = Standard Dimensions Ratio - nominal ratio of pipe outside diameter to wall thickness

* other SDR options available (SDR21, SDR17, SDR13.6, SDR11) ** Supplied on drums

*** Full Colour Options = Orange (O), Green (G), Red (R), Salmon (S), Violet (V), Brown (B), Black (Blk), White (W), Grey (Gr)

Custom sizes / colours / lengths / specifications / print available. Min. order quantities and lead times apply to non-stock items.

For more information: **0800 MARLEY (0800 627539)**

www.marley.co.nz

an *Aliaxis* company

Cable Management Solutions

MARLEY®